


# Request for Quotation

Issued Date: April 11<sup>th</sup> 2017

RFQ #: 1011

Closing Date: April 13<sup>rd</sup> 2017



**noble oak**  
YOUR PROJECT OUR SERVICE

Interior Project

44 Hazelhurst St.

Dartmouth

**Job Scope:** Remove partition wall dividing the kitchen and the living room space. Supporting post on the exterior wall side needs to be flush but bulkhead can be created for beam. All hardwood floors to be refinished and new hardwood laid in the family room and stairwell leading to the kitchen. The kitchen, Main floor bathroom, and rental unit kitchen will have existing flooring removed and replaced with new tile. Expose joists in the family room ceiling and remove fireplace chimney. Inspect pictures below, as more items are listed in detail.



Figure 1 - Kitchen view

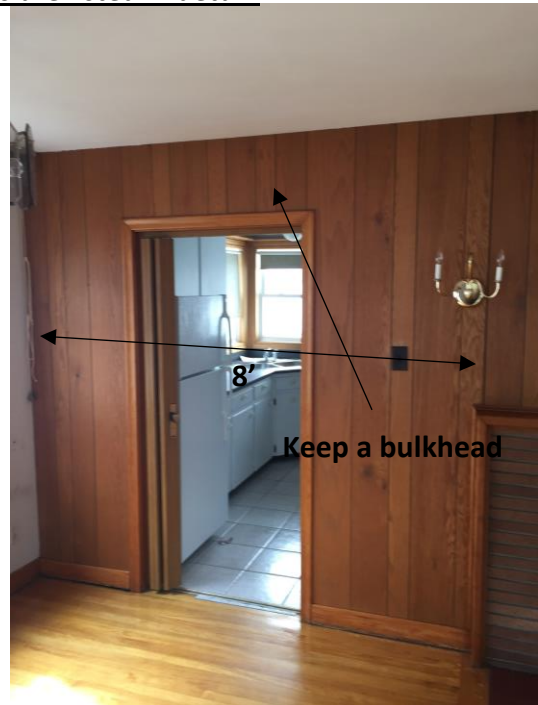


Figure 2 - Living room view



*Example 4 –Family room existing stairs to be rebuild*



*Example 3 –Family room stairs from below*



*Figure 3 - Family room fire place*



*Figure 4 - Landing to family room*

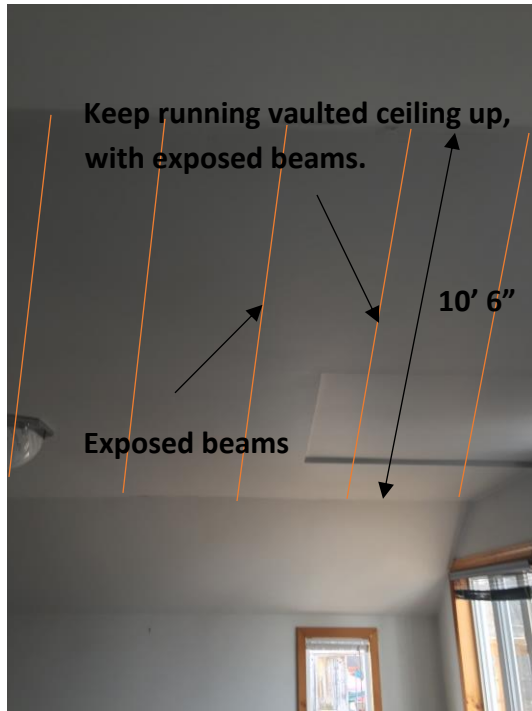


Figure 5- Family room ceiling

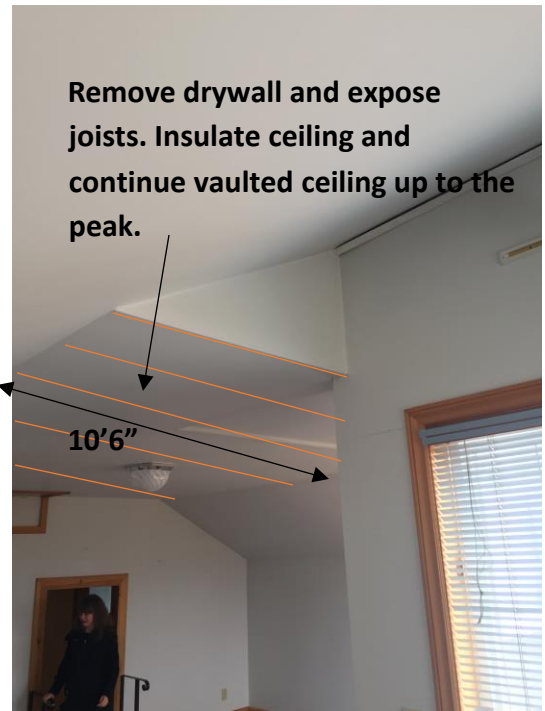


Figure 6 - Family room ceiling

### Refinish Floors:

- Living room – 266sqft
- Hallway 60sqft (Including 1 2'x2' closet)
- Bedroom – 151sqft (Including 2 closets 2'x2')
- Bedroom1 – 126sqft (Including 1 closet 2'x2')

### New hardwood:

- Family Room – 341sqft (Include removal of existing carpet)
- Family Room Stairs – 2 Treads
- Landing before Family Room – 9sqft w/ Threshold to kitchen tile.

### Tile:

- Kitchen – 128sqft (Based on 12" ceramic tile) Existing flooring: Tile
- Main Bathroom – 40sqft (Based on 12" ceramic tile) Existing flooring: Rolled flooring
- Front Entrance – 25sqft (Based on 12" ceramic tile) Existing Flooring: Rolled flooring
- Rental Unit kitchen- 108sqft (Based on 12" ceramic tile) Existing Flooring: Rolled flooring



Figure 7 - Rental unit new counter top

**Conclusion:** *Supply and install all building materials to complete this project, including tile and hardwood allowances.. Measurements are approximate measurements and should be remeasured before starting project. Plumbing, electrical, trim work, and painting provided by homeowners.*